


Cylindrical end mills NVS

Smooth-edged, normal version, short neck
High-performance penetration edge





HM
MG10 λ 45°
 γ 15°

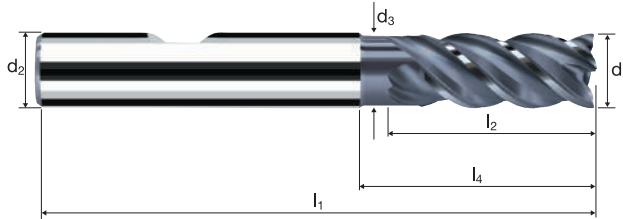

Rm < 850	Rm 850-1100	Rm 1100-1300						Inox Stainless	Ti Titanium	GG(G) Copper Tool Steel
-------------	----------------	-----------------	--	--	--	--	--	-------------------	----------------	-------------------------------

Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r	α	z	POLYCHROM	
											P8404	P8304
140	2.00	6.00	1.90	57	7.00	10.00	18.31	0.050	7.0°	4	●	
160	2.50	6.00	2.30	57	8.00	10.00	17.56	0.050	6.5°	4	●	
178*	3.00	3.00	2.80	45	8.00	13.56	14.00	0.050	0.0°	4	●	
180	3.00	6.00	2.80	57	8.00	14.00	20.63	0.050	4.5°	4	●	
200	3.50	6.00	3.20	57	8.00	14.00	19.88	0.050	4.0°	4	●	
218*	4.00	4.00	3.70	50	11.00	15.47	16.00	0.100	0.0°	4	●	
220	4.00	6.00	3.70	57	11.00	16.00	20.95	0.100	3.0°	4	●	
240	4.50	6.00	4.10	57	12.00	16.00	20.20	0.100	2.5°	4	●	
258*	5.00	5.00	4.60	50	13.00	15.40	16.00	0.100	0.0°	4	●	
260	5.00	6.00	4.60	57	13.00	18.00	21.27	0.100	1.5°	4	●	
280	5.50	6.00	5.00	57	13.00	20.00	22.52	0.100	1.0°	4	●	
300	6.00	6.00	5.50	57	13.00	19.34	20.00	0.100	0.0°	4	●	
331	7.00	8.00	6.40	63	16.00	24.00	27.64	0.100	1.5°	4	●	
391	8.00	8.00	7.40	63	19.00	25.29	26.00	0.150	0.0°	4	●	
420	9.00	10.00	8.20	72	19.00	26.00	30.02	0.200	1.5°	4	●	
450	10.00	10.00	9.20	72	22.00	30.20	31.00	0.200	0.0°	4	●	
501	12.00	12.00	11.00	83	26.00	36.13	37.00	0.200	0.0°	4	●	
610	16.00	16.00	15.00	92	32.00	42.13	43.00	0.200	0.0°	4	●	
682	20.00	20.00	19.00	104	38.00	52.13	53.00	0.200	0.0°	4	●	
* without clamping flat only												

Application



Material

Steel
< 850 N/mm²

Steel
850 - 1100 N/mm²

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Inox difficile
[Cr-Ni-Mo+/1.4529]
Heat resistant steel
[1.4841]


d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _Z [°]
3.00	4	150	0.018	4.500	1.200	15915	1145	6.2	16°
4.00	4	150	0.022	6.000	1.600	11935	1050	10.1	16°
5.00	4	150	0.028	7.500	2.000	9550	1070	16.0	16°
6.00	4	150	0.035	9.000	2.400	7960	1115	24.1	16°
8.00	4	150	0.045	12.000	3.200	5970	1075	41.3	16°
10.00	4	150	0.060	15.000	4.000	4775	1145	68.8	16°
12.00	4	150	0.065	18.000	4.800	3980	1035	89.4	16°
16.00	4	150	0.075	24.000	6.400	2985	895	137.5	16°
20.00	4	150	0.090	30.000	8.000	2385	860	206.3	16°

3.00	4	125	0.015	4.500	1.200	13265	795	4.3	15°
4.00	4	125	0.018	6.000	1.600	9945	715	6.9	15°
5.00	4	125	0.024	7.500	2.000	7960	765	11.5	15°
6.00	4	125	0.030	9.000	2.400	6630	795	17.2	15°
8.00	4	125	0.040	12.000	3.200	4975	795	30.6	15°
10.00	4	125	0.055	15.000	4.000	3980	875	52.5	15°
12.00	4	125	0.060	18.000	4.800	3315	795	68.8	15°
16.00	4	125	0.070	24.000	6.400	2485	695	107.0	15°
20.00	4	125	0.080	30.000	8.000	1990	635	152.8	15°

3.00	4	85	0.013	4.500	1.200	9020	470	2.5	9°
4.00	4	85	0.016	6.000	1.600	6765	435	4.2	9°
5.00	4	85	0.020	7.500	2.000	5410	435	6.5	9°
6.00	4	85	0.025	9.000	2.400	4510	450	9.7	9°
8.00	4	85	0.035	12.000	3.200	3380	475	18.2	9°
10.00	4	85	0.045	15.000	4.000	2705	485	29.2	9°
12.00	4	85	0.050	18.000	4.800	2255	450	39.0	9°
16.00	4	85	0.060	24.000	6.400	1690	405	62.3	9°
20.00	4	85	0.070	30.000	8.000	1355	380	90.9	9°

3.00	4	45	0.013	4.500	1.200	4775	250	1.3	7°
4.00	4	45	0.016	6.000	1.600	3580	230	2.2	7°
5.00	4	45	0.020	7.500	2.000	2865	230	3.4	7°
6.00	4	45	0.025	9.000	2.400	2385	240	5.2	7°
8.00	4	45	0.035	12.000	3.200	1790	250	9.6	7°
10.00	4	45	0.045	15.000	4.000	1430	260	15.5	7°
12.00	4	45	0.050	18.000	4.800	1195	240	20.6	7°
16.00	4	45	0.060	24.000	6.400	895	215	33.0	7°
20.00	4	45	0.070	30.000	8.000	715	200	48.1	7°

Application



Material

Steel
< 850 N/mm²

Steel
850 - 1100 N/mm²

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Inox difficile
[Cr-Ni-Mo+/1.4529]
Heat resistant steel
[1.4841]

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _R [°]	LR [mm]
3.00	4	120	0.014	1.800	3.000	12730	715	3.9	26°	3.7
4.00	4	120	0.018	2.800	4.000	9550	690	7.7	26°	5.7
5.00	4	120	0.022	4.000	5.000	7640	670	13.4	26°	8.2
6.00	4	120	0.028	6.000	6.000	6365	715	25.7	26°	12.3
8.00	4	120	0.036	8.000	8.000	4775	690	44.0	26°	16.4
10.00	4	120	0.048	10.000	10.000	3820	735	73.3	26°	20.5
12.00	4	120	0.052	12.000	12.000	3185	660	95.3	26°	24.6
16.00	4	120	0.060	16.000	16.000	2385	575	146.7	26°	32.8
20.00	4	120	0.072	20.000	20.000	1910	550	220.0	26°	41.0

3.00	4	100	0.011	1.800	3.000	10610	465	2.5	24°	4.0
4.00	4	100	0.014	2.800	4.000	7960	445	5.0	24°	6.3
5.00	4	100	0.020	4.000	5.000	6365	510	10.2	24°	9.0
6.00	4	100	0.024	6.000	6.000	5305	510	18.3	24°	13.5
8.00	4	100	0.032	8.000	8.000	3980	510	32.6	24°	18.0
10.00	4	100	0.044	10.000	10.000	3185	560	56.0	24°	22.5
12.00	4	100	0.048	12.000	12.000	2655	510	73.3	24°	27.0
16.00	4	100	0.056	16.000	16.000	1990	445	114.1	24°	35.9
20.00	4	100	0.064	20.000	20.000	1590	405	163.0	24°	44.9

3.00	4	70	0.010	1.800	3.000	7425	295	1.6	11°	9.3
4.00	4	70	0.013	2.800	4.000	5570	290	3.2	11°	14.4
5.00	4	70	0.016	4.000	5.000	4455	285	5.7	11°	20.6
6.00	4	70	0.020	6.000	6.000	3715	295	10.7	11°	30.9
8.00	4	70	0.028	8.000	8.000	2785	310	20.0	11°	41.2
10.00	4	70	0.036	10.000	10.000	2230	320	32.1	11°	51.4
12.00	4	70	0.040	12.000	12.000	1855	295	42.8	11°	61.7
16.00	4	70	0.048	16.000	16.000	1395	265	68.4	11°	82.3
20.00	4	70	0.056	20.000	20.000	1115	250	99.8	11°	102.9

3.00	4	35	0.010	1.800	3.000	3715	150	0.8	10°	10.2
4.00	4	35	0.013	2.800	4.000	2785	145	1.6	10°	15.9
5.00	4	35	0.016	4.000	5.000	2230	145	2.9	10°	22.7
6.00	4	35	0.020	6.000	6.000	1855	150	5.3	10°	34.0
8.00	4	35	0.028	8.000	8.000	1395	155	10.0	10°	45.4
10.00	4	35	0.036	10.000	10.000	1115	160	16.0	10°	56.7
12.00	4	35	0.040	12.000	12.000	930	150	21.4	10°	68.1
16.00	4	35	0.048	16.000	16.000	695	135	34.2	10°	90.7
20.00	4	35	0.056	20.000	20.000	555	125	49.9	10°	113.4