



# Corner radius end mills MicroX

Shank  $\varnothing$  6mm, cylindrical neck, 5xd

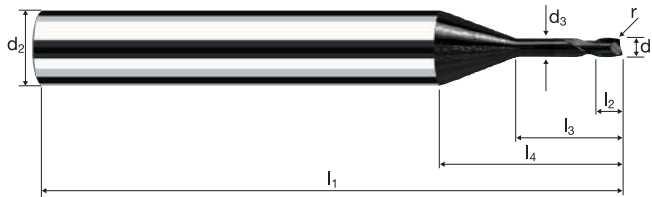

HM	$\lambda$ 30°
XA	$\gamma$ 15°



				C								CF / GF Fiber Reinforced Plastics
				Graphite								

IV

Example: Order-N°.											DIAPLUS	
											B6034	
$\varnothing$ Code	$d_1$ 0/-0.01	$d_2$ h4	$d_3$	$l_1$	$l_2$	$l_3$	$l_4$	$r$ $\pm 0.005$	$\alpha$	$z$		
020	0.20	6.00	0.18	57	0.20	1.00	17.94	-	13.8°	2	●	
030	0.30	6.00	0.25	57	0.30	1.50	18.24	-	13.2°	2	●	
018	0.20	6.00	0.18	57	0.20	1.00	17.94	0.050	13.8°	2	●	
028	0.30	6.00	0.25	57	0.30	1.50	18.24	0.050	13.2°	2	●	
040	0.40	6.00	0.35	57	0.40	2.00	18.46	0.050	12.7°	2	●	
048	0.50	6.00	0.45	57	0.50	2.50	13.51	0.050	12.2°	2	●	
058	0.60	6.00	0.55	57	0.60	3.00	13.83	0.050	11.7°	2	●	
078	0.80	6.00	0.75	57	0.80	4.00	14.45	0.050	10.8°	2	●	
096	1.00	6.00	0.95	57	1.00	5.00	15.08	0.050	9.9°	2	●	
050	0.50	6.00	0.45	57	0.50	2.50	13.51	0.100	12.2°	2	●	
060	0.60	6.00	0.55	57	0.60	3.00	13.83	0.100	11.7°	2	●	
080	0.80	6.00	0.75	57	0.80	4.00	14.45	0.100	10.8°	2	●	
098	1.00	6.00	0.95	57	1.00	5.00	15.08	0.100	9.9°	2	●	
138	2.00	6.00	1.90	57	2.00	10.00	18.31	0.100	6.5°	2	●	

Application	Material	d1 [mm]	z	f <sub>z</sub> [mm]	a <sub>p</sub> [mm]	a <sub>e</sub> [mm]	n=15000 min <sup>-1</sup> vf [mm/min]	n=25000 min <sup>-1</sup> vf [mm/min]	n=30000 min <sup>-1</sup> vf [mm/min]	n=45000 min <sup>-1</sup> vf [mm/min]
	Graphite <b>B</b> <b>B</b>	0.20	2	0.002	0.100	0.100	60	100	120	180
		0.30	2	0.004	0.150	0.200	120	200	240	360
		0.40	2	0.005	0.200	0.250	150	250	300	450
		0.50	2	0.006	0.250	0.300	180	300	360	540
		0.60	2	0.007	0.250	0.350	210	350	420	630
		0.80	2	0.009	0.350	0.500	270	450	540	810
		1.00	2	0.012	0.450	0.600	360	600	720	1080
		2.00	2	0.024	0.900	1.200	720	1200	1440	2160
	Graphite <b>B</b> <b>B</b>	0.20	2	0.002	0.100	0.200	60	100	120	180
		0.30	2	0.003	0.150	0.300	90	150	180	270
		0.40	2	0.004	0.200	0.400	120	200	240	360
		0.50	2	0.005	0.250	0.500	150	250	300	450
		0.60	2	0.005	0.250	0.600	150	250	300	450
		0.80	2	0.007	0.350	0.800	210	350	420	630
		1.00	2	0.009	0.450	1.000	270	450	540	810
		2.00	2	0.018	0.900	2.000	540	900	1080	1620
	Graphite <b>B</b> <b>B</b>	0.20	2	0.003	0.030	0.040	90	150	180	270
		0.30	2	0.004	0.040	0.060	120	200	240	360
		0.40	2	0.005	0.060	0.080	150	250	300	450
		0.50	2	0.007	0.070	0.100	210	350	420	630
		0.60	2	0.008	0.080	0.120	240	400	480	720
		0.80	2	0.011	0.110	0.160	330	550	660	990
		1.00	2	0.013	0.140	0.200	390	650	780	1170
		2.00	2	0.027	0.280	0.400	810	1350	1620	2430
	Graphite <b>B</b> <b>B</b>	0.20	2	0.003	0.040	0.040	90	150	180	270
		0.30	2	0.004	0.050	0.050	120	200	240	360
		0.40	2	0.005	0.070	0.070	150	250	300	450
		0.50	2	0.007	0.090	0.090	210	350	420	630
		0.60	2	0.008	0.110	0.110	240	400	480	720
		0.80	2	0.011	0.140	0.140	330	550	660	990
		1.00	2	0.013	0.180	0.180	390	650	780	1170
		2.00	2	0.027	0.360	0.360	810	1350	1620	2430



Application	Material	d1 [mm]	z	f <sub>z</sub> [mm]	a <sub>p</sub> [mm]	a <sub>e</sub> [mm]	n=15000 min <sup>-1</sup> vf [mm/min]	n=25000 min <sup>-1</sup> vf [mm/min]	n=30000 min <sup>-1</sup> vf [mm/min]	n=45000 min <sup>-1</sup> vf [mm/min]
	Graphite <b>B</b> <b>B</b>	0.80	2	0.009	0.350	0.500	270	450	540	810
		1.00	2	0.012	0.450	0.600	360	600	720	1080
		1.50	2	0.018	0.700	0.900	540	900	1080	1620
		2.00	2	0.024	0.900	1.200	720	1200	1440	2160
		3.00	2	0.035	1.350	1.800	1050	1750	2100	3150
		4.00	2	0.047	1.800	2.400	1410	2350	2820	4230
		5.00	2	0.059	2.250	3.000	1770	2950	3540	5310
6.00	2	0.071	2.700	3.600	2130	3550	4260	6390		
	Graphite <b>B</b> <b>B</b>	0.80	2	0.007	0.350	0.800	210	350	420	630
		1.00	2	0.009	0.450	1.000	270	450	540	810
		1.50	2	0.014	0.700	1.500	420	700	840	1260
		2.00	2	0.018	0.900	2.000	540	900	1080	1620
		3.00	2	0.027	1.350	3.000	810	1350	1620	2430
		4.00	2	0.036	1.800	4.000	1080	1800	2160	3240
		5.00	2	0.045	2.250	5.000	1350	2250	2700	4050
6.00	2	0.055	2.700	6.000	1650	2750	3300	4950		
	Graphite <b>B</b> <b>B</b>	0.80	2	0.011	0.110	0.160	330	550	660	990
		1.00	2	0.013	0.140	0.200	390	650	780	1170
		1.50	2	0.020	0.210	0.300	600	1000	1200	1800
		2.00	2	0.027	0.280	0.400	810	1350	1620	2430
		3.00	2	0.040	0.420	0.600	1200	2000	2400	3600
		4.00	2	0.053	0.560	0.800	1590	2650	3180	4770
		5.00	2	0.067	0.700	1.000	2010	3350	4020	6030
6.00	2	0.080	0.840	1.200	2400	4000	4800	7200		
	Graphite <b>B</b> <b>B</b>	0.80	2	0.011	0.140	0.140	330	550	660	990
		1.00	2	0.013	0.180	0.180	390	650	780	1170
		1.50	2	0.020	0.270	0.270	600	1000	1200	1800
		2.00	2	0.027	0.360	0.360	810	1350	1620	2430
		3.00	2	0.040	0.540	0.540	1200	2000	2400	3600
		4.00	2	0.053	0.720	0.720	1590	2650	3180	4770
		5.00	2	0.067	0.900	0.900	2010	3350	4020	6030
6.00	2	0.080	1.080	1.080	2400	4000	4800	7200		